



EPSILON

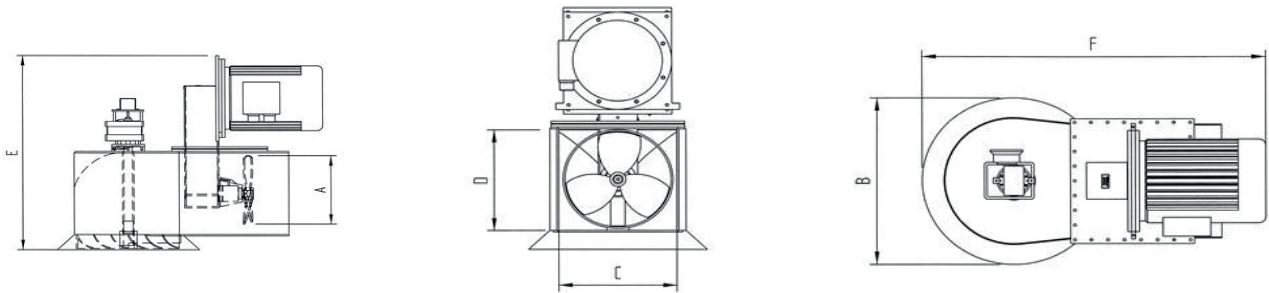

Type	pk	kW	A (prop)	B	C	D	E	F
15E	15	11	Ø 302	624	334	334	828	1132
25E	25	18,5	Ø 428	762	475	461	1025	1328
40E	40	30	Ø 428	762	475	461	1114	1400
50E	50	37	Ø 428	762	475	461	1207	1457
61E	61	45	Ø 530	908	600	575	1264	1678
75E	75	55	Ø 530	908	600	575	1364	1694

400V Elektrisch aangedreven met horizontaal gemonteerde motor tot 55 kW = 75 pk

Maten in mm. Grotere en tussenliggende maten en/of vermogens en andere spanningen op aanvraag.

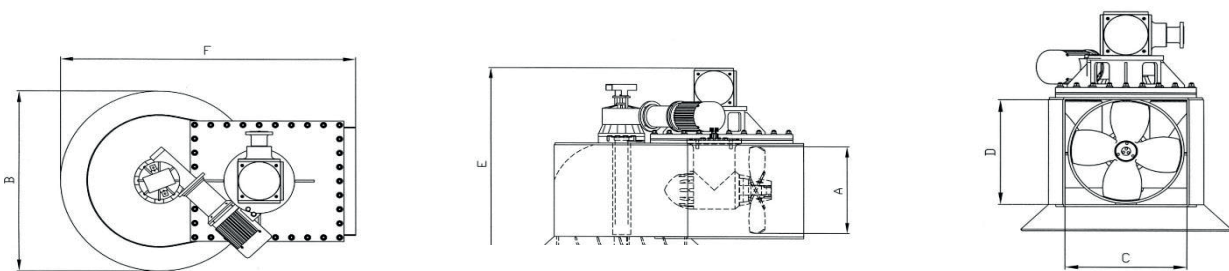

Type	pk	kW	A (prop)	B	C	D	E	F
118D	118	88	Ø 574	1108	640	608	1272	1654
200/300D	200/300	150/220	Ø 800	1362	880	850	1709	2161
300/400D	300/400	220/294	Ø 1050	1815	1130	1085	2044	2338
600D	600	441	Ø 1300	2193	1350	1360	2305	3046

Diesel aangedreven vanaf 88 kW= 118 PK tot 448 kW= 600 PK

Maten in mm. Grotere en tussenliggende maten en/of vermogens en andere spanningen op aanvraag.